

# Low Noise Pulse Distribution Amplifier

- Excellent short term stability and phase noise
- Comprehensive specification & options
- DC to 100MHz Bandwidth
- Three years warranty



## Description

The E5-6P Distribution Amplifier is a 1U Rack Mount unit. The E5-6P allows a cost and space efficient way to distribute reference frequencies throughout a system or lab with virtually no signal degradation. The standard E5-6P accepts input frequencies of DC to 100MHz and provides single or multiple input outputs.

## Features

- Multiple inputs & outputs
- -128dB phase noise at 1Hz offset at 10MHz
- >80dB at 10MHz isolation
- 0 dBm to +16dBm input
- Pulse, CMOS, TTL
- Internal battery backup (Optional)
- High isolation & Low distortion

## Applications

- Industrial calibration laboratories
- Telecom applications
- Laboratories reference distribution
- Production Test Reference for instrumentation

### **Included with shipment:**

Calibration certificate, Certificate of Conformance, and 36 month warranty.

## Available products in the same family

- **E5000:** Low noise sinewave distribution amplifier. 1, 2 or 3 inputs and 12, 24 or 36 outputs.
- **E5-6:** 1 input 6 outputs distribution amplifier
- **E5-6P:** 1 input 6 outputs Pulse, CMOS, TTL distribution amplifier

## Specification

Outputs <i>See options</i>		
	Standard	See options 11, 12 & 13
No of inputs	1	Multiple inputs available
No of outputs	6	Available 6 - 12
Connector	BNC	SMA (Optional)
Input characteristics		
		Options A
Impedance	50Ω	75Ω
Input level	2.4V High 0.15V Low	Into 50 ohms
Frequency range	0 to 100MHz	
Duty cycle	50%	
Output characteristics		
		Options B
Impedance	50Ω	75Ω
Output level	0V and 5V on high load impedance 0V and 2.5V on 50 ohms load impedance	
Rise time	<1ns	Condition: 10-90%
Fall time	<1ns	Condition: 10-90%
Jitter(rms)	<10ps	
Propagation delay: 8ns at 50 ohms		
Overshoot and undershoot: <5%		
Isolation		
Output to output	>84dB at 10MHz	
Output to input	>80dB at 10MHz	
Non- adjacent output	>80dB at 10MHz	
Frequency Stability <i>Allan Deviation</i>		
Frequency	10MHz	
$\tau = 1s$	$2 \times 10^{-13}$	
$\tau = 10s$	$2 \times 10^{-14}$	
$\tau = 100s$	$5 \times 10^{-15}$	
Phase Noise (SSB)		
Frequency	10MHz	
1Hz	-128 dBc	
10Hz	-145 dBc	
100Hz	-155 dBc	
1 kHz	-160 dBc	
10KHz	-160 dBc	

## Environmental

<i>Temperature :</i>	Operating	-20°C +85°C
	Storage	-40°C +90°C
<i>Temp stability :</i>	-20°C +60°C	$1 \times 10^{-9}$
<i>Relative humidity :</i>	95% non-condensing	
<i>Magnetic Field sensitivity :</i>	3.210 <sup>-11</sup> Gauss	
<i>Approximate MTBF :</i>	200,000 Hrs, Stationary	
<i>Dimensions :</i>	122 x 105 x 60mm LWH	

## Power supply

*AC power:* 90-245V AC, 50Hz

*Optional redundancy switch:* see option 00

Seamless battery back-up switch

## Built-in options

- Option 00:** Redundant switchover for external power back-up
- Option 11:** 1 input 12 output
- Option 12:** 2 inputs 2 x 6 outputs
- Option 13:** 3 inputs 3 x 6 outputs
- Option 18:** Extended warranty to 3 years
- Option 51:** Rack Mount 19" 1U
- Option 52:** Rack Mount 19" 2U
- Option 53:** Rack Mount 19" 3U
- Option 64:** DC input: Specify +12V, +24V, +48V or +60V
- Option 75:** Add internal battery, up to 24 hours of battery life.
- Option 91:** 10MHz input 1MHz output
- Option 92:** 10MHz input 5MHz output
- Option 93:** 10MHz input 1PPS output


**Included with shipment:** Calibration certificate, Certificate of Conformance, product test report and 36 month warranty.

Contact us to configure this product to meet your requirement.  
**Designed and manufactured in the U.K.**


## Typical configuration

The E5-6 can be configured to multi input multi outputs frequencies from 1 to 100MHz. Standard input & output connectors: BNC and SMA

E5-6 enclosure dimensions configured with 1 input 6 BNC outputs

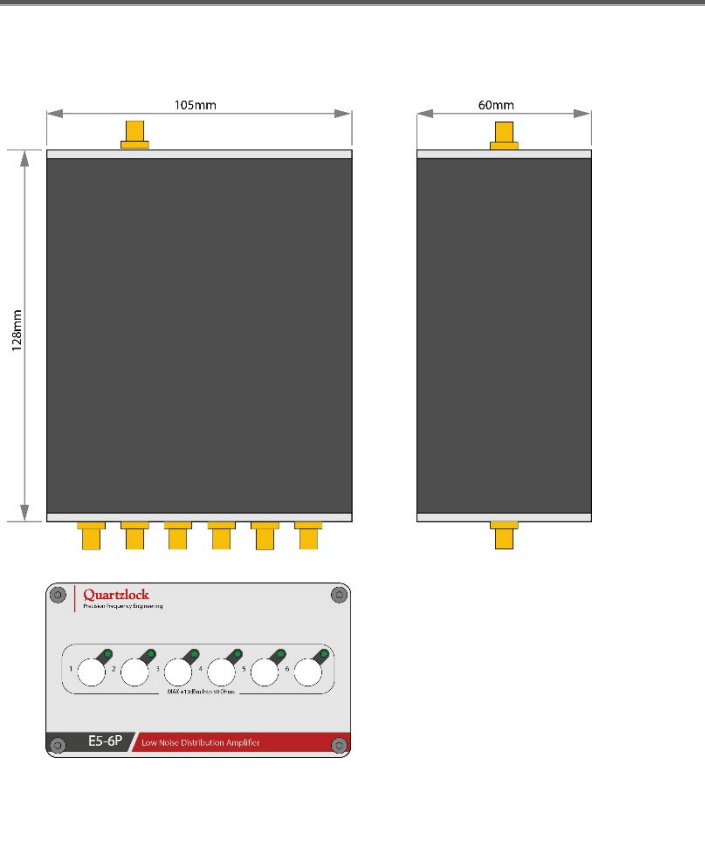

E5-6 enclosure dimensions configured with 1 input 6 SMA outputs

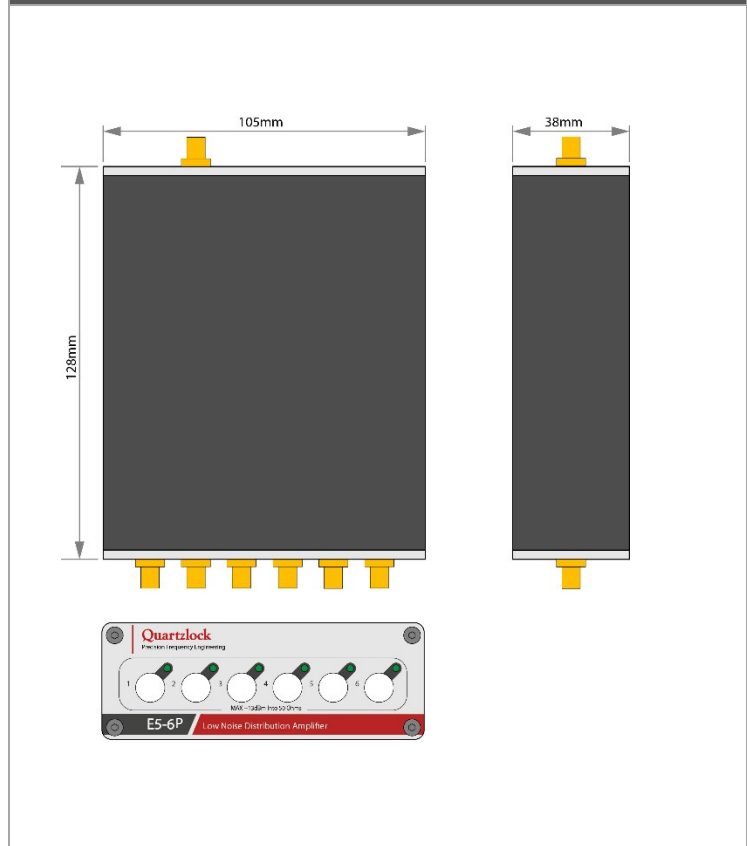

The Quartzlock logo is a registered trademark.  
Quartzlock continuous improvement policy: spec subject to change without notice and not part of any contract. Copyright © 2020. Issue 20.01

