

Low Noise Distribution Amplifier

- Excellent short term stability and phase noise
- Comprehensive specification & options
- 1MHz – 100MHz Bandwidth
- Two years warranty



Description

The E5000 Distribution Amplifier is a 1U Rack Mount unit. The E5000 allows a cost and space efficient way to distribute reference frequencies throughout a system or lab with virtually no signal degradation. The standard E5000 accepts input frequencies of 1MHz to 100MHz and provides twelve outputs of the same frequency.

Features

- Multiple inputs & outputs
- -132dB phase noise at 1Hz offset at 10MHz
- >80dB at 10MHz isolation
- Unity gain
- 0 dBm to +12dBm input
- Internal battery backup
- High isolation & Low distortion

Applications

- Industrial calibration laboratories
- Telecom applications
- Laboratories reference distribution
- Production Test Reference for instrumentation

Included with shipment:

Calibration certificate, Certificate of Conformance, and 24 month warranty.

Available products in the same family

- **A5000P** : Pulse, CMOS, TTL distribution amplifier. 1, 2 or 3 inputs and 12, 24 or 36 outputs.
- **E5-6** : 1 input 6 outputs distribution amplifier
- **E5-6P** : 1 input 6 outputs Pulse, CMOS, TTL distribution amplifier

Specification

Outputs <i>See options</i>		
See options 11, 12 & 13		
No of inputs	1	Multiple inputs available
No of outputs	12	Multiple of 6 or 12 outputs available
Connector	BNC	SMA (Optional)
Input characteristics		
Options A		
Impedance	50Ω	75Ω
Input level	+10dBm Nominal	
Input SWR	<1.2:1 at 10MHz	
Input return loss	>21dBm	
Output characteristics		
Options B		
Impedance	50Ω	75Ω
Output level	+12dBm (max) into 50 Ω at 10MHz	
Output SWR	<1.2:1	
Frequency response		
Range	1MHz to 100MHz	
Harmonics	Source harmonics <-60dBc 2 nd Harmonic <-50dBc 3 rd Harmonics <-50dBc	
Isolation		
Output to output	>80dB at 10MHz	
Output to input	>80dB at 10MHz	
Non- adjacent output	>80dB at 10MHz	
Frequency Stability <i>Allan Deviation</i>		
Frequency	10MHz	
$\tau = 1s$	2×10^{-13}	
$\tau = 10s$	2×10^{-14}	
$\tau = 100s$	5×10^{-15}	
Phase Noise (SSB)		
Frequency	10MHz	
1Hz	-132 dBc	
1Hz	-144 dBc	
100Hz	-153 dBc	
1 kHz	-158 dBc	
10KHz	-160 dBc	
Spurious		
Spurious	<-100dBc/Hz	
Broadband Noise	<-155dBc/Hz	

Included with shipment: Calibration certificate, Certificate of Conformance, product test report and 24 month warranty.

Environmental

<i>Temperature :</i>	Operating	-20°C +60°C
	Storage	-40°C +80°C
<i>Temp stability :</i>	-20°C +60°C	1x10 ⁻⁹
<i>Relative humidity :</i>	95% non-condensing	
<i>Magnetic Field sensitivity :</i>	2x10 ⁻¹¹ Gauss	
<i>Approximate MTBF :</i>	200,000 Hrs, Stationary	
<i>Dimensions :</i>	1U 19" rack mount 44 X 444 X 221	


Power supply

<i>AC power:</i>	90-245V AC, 50Hz
<i>Optional redundancy switch:</i>	see option 00

Seamless battery back-up switch

Built-in options

- Option 00:** Redundant switchover for external power back-up
- Option 11:** 1 input 24/32 output
- Option 12:** 2 inputs 12/24 outputs
- Option 13:** 3 inputs 12/24/32 outputs
- Option 18:** Extended warranty to 3 years
- Option 51:** Rack Mount 19" 1U
- Option 52:** Rack Mount 19" 2U
- Option 53:** Rack Mount 19" 3U
- Option 62:** AC Input 110V
- Option 64:** DC input: Specify +12V, +24V, +48V or +60V
- Option 75:** Add internal battery, up to 24 hours of battery life.
- Option 91:** 10MHz input 1MHz output
- Option 92:** 10MHz input 5MHz output
- Option 93:** 10MHz input 1PPS output

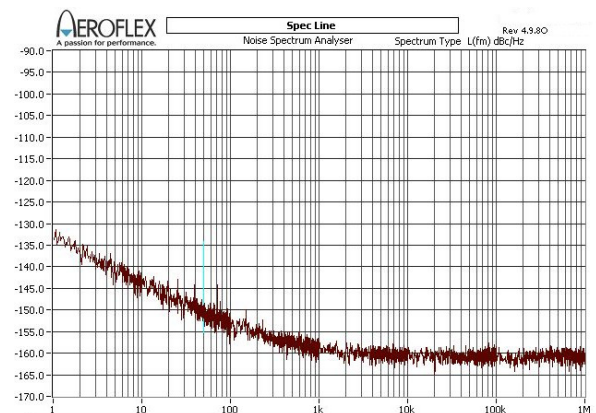


E5000 phase noise measurement at 10MHz

Contact us to configure this product to meet your requirement.
Designed and manufactured in the U.K.

Typical configuration

The E5000 can be configured to multi input multi outputs frequencies from 1 to 100MHz of any signal format.

Standard input & output connectors: BNC and SMA

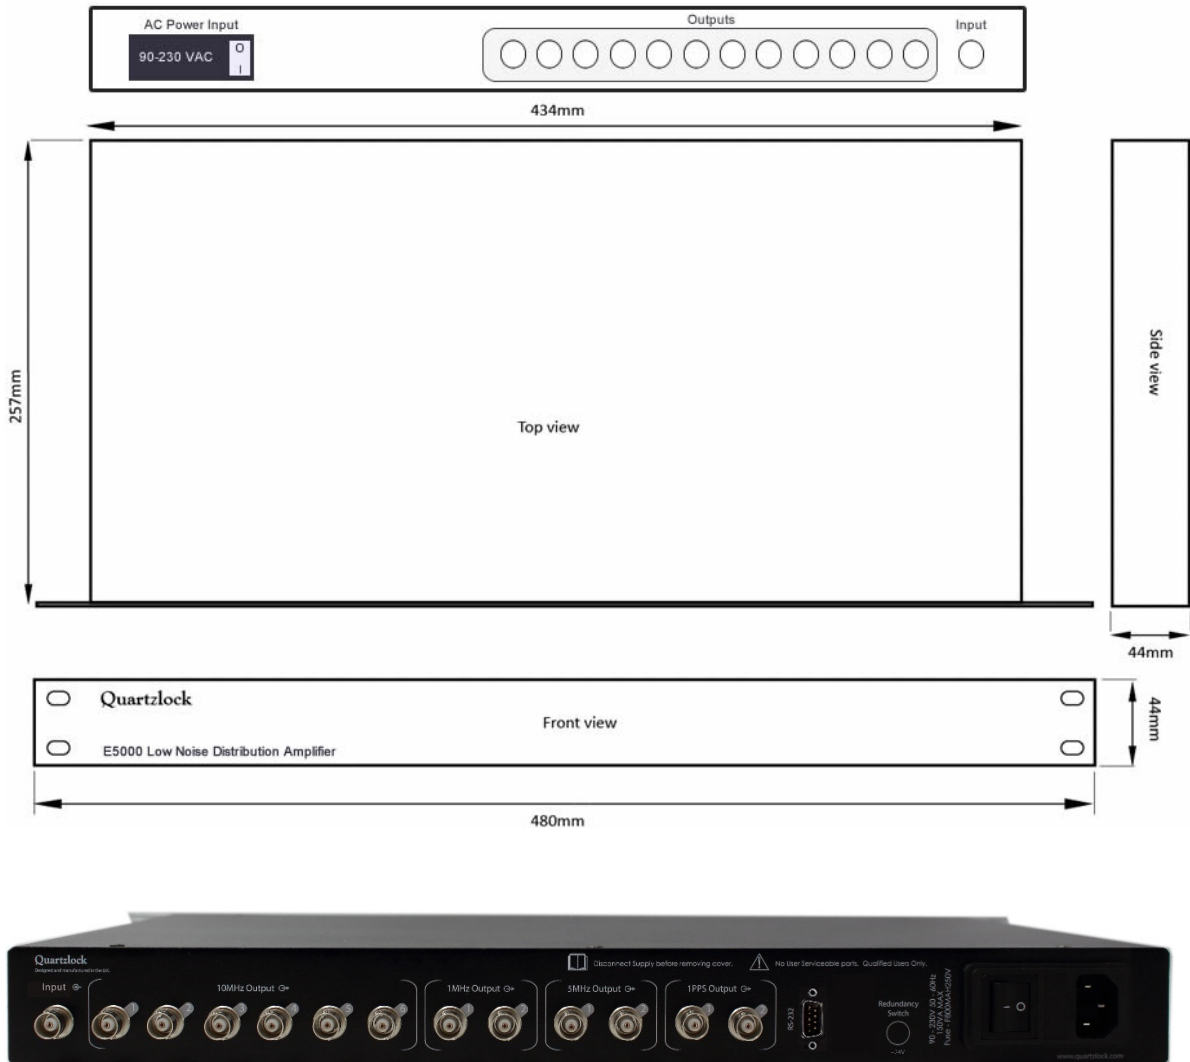

Example of rear panel configuration with 10MHz input and 1MHz, 5MHz & 1PPS output

The Quartzlock logo is a registered trademark.

Quartzlock continuous improvement policy: spec subject to change without notice and not part of any contract.

Copyright © 2017. Issue 017.01