

Low Noise Rubidium Oscillator Module

Features

- Sine wave or CMOS/TTL output
- Short term stability 2×10^{-12} at 100sec
- Accuracy 5×10^{-11}
- Phase noise -115dBc at 1Hz
- 100 times less drift than OCXOs
- Low power consumption
- Compatible with 50Ω or 75Ω load



Description

The E10-LN Low Noise Rubidium Oscillator Module is a sub miniature atomic clock combined with 'active noise filter' technology. This rubidium oscillator has 100x less drift than OCXO's. With short term stability of 2×10^{-12} /s @ 100s this rubidium oscillator provides significant improvement in performance over other rubidium components.

Applications

- Where sizes are restricted this 'breakthrough' low noise rubidium oscillator will enable new applications
- Extended holdover for CDMA, WiMAX and LTE base stations
- Higher stability and low phase noise communication and surveillance applications
- Compact designs and portable and mobile applications
- Production Test Reference for instrumentation
- Microwave Test Bench or Test solution

Related products

- **E10-Y** : Low Noise Desktop & Bench top Frequency reference 4 or 8 outputs
- **E10-P** : Desktop & Bench top Frequency reference 1 to 4 outputs
- **A1000**: 1U 19" rack mount up to 12 output, frequencies 1 to 100MHz
- **A10-M**: 2U 19" rack mount up to 24 output, frequencies 1 to 100MHz

A10-M Specification

Outputs *See options*

10MHz	+7dBm (± 2 dBm) into 50 Ohms, 0.5V _{rms} (Specify for 75Ω load)
Connector	SMA

Frequency Stability *Allan Deviation*

	Options A	Options B
Frequency	10MHz	10MHz
$\tau = 1s$	$\leq 2 \times 10^{-12}$	$\leq 5 \times 10^{-13}$
$\tau = 10s$	$\leq 5 \times 10^{-12}$	$\leq 6 \times 10^{-13}$
$\tau = 100s$	$\leq 2 \times 10^{-12}$	$\leq 8 \times 10^{-13}$

Phase Noise (SSB)

	Options 1	Options 2	Options 3
Frequency	10MHz	10MHz	10MHz
1Hz	-110 dBc	-113 dBc	-115 dBc
1Hz	-135 dBc	-138 dBc	-140 dBc
100Hz	-145 dBc	-152 dBc	-154 dBc
1 kHz	-155 dBc	-155 dBc	-155 dBc
10KHz	-158 dBc	-158 dBc	-160 dBc

Harmonics

	<-30dBc	Options C <-45dBc
--	---------	----------------------

Spurious

100 KHz BW	<-100dBc	<-100dBc
------------	----------	----------

Aging (After 30 days)

Frequency	10MHz
Per day	5×10^{-12}
Per Month	5×10^{-11}
Per Year	5×10^{-10}

Frequency accuracy

Accuracy at shipping 5×10^{-11}

Frequency retrace

After 1 hours of continues operation 3×10^{-11}

Frequency Adjustment

Mechanical	$\pm 2 \times 10^{-9}$	Optional
Electrical	$\pm 5 \times 10^{-9}$	Control voltage 0 to +5V

Warm up time

<5 minutes, time to lock
<6 minutes to 1×10^{-9} at room temperature 25°C

Included with shipment: Calibration certificate, Certificate of Conformance, product test sheet and 24 month warranty.

Environmental

Temperature :	Operating	-40°C +60°C
	Storage	-40°C +90°C
Temp stability :	-20°C +60°C	0.3×10^{-9}
Relative humidity :	94% non-condensing	
Magnetic Field sensitivity :	5×10^{-12} Gauss	
Atmospheric pressure :	1×10^{-13} Per mbar	
Approximate MTBF :	100,000 Hrs, Stationary	
Dimensions without cover	96 x 60 x 35mm LWH	
Dimensions with cover	101 x 60 x 39mm LWH	

Power supply


DC power:	+12 to +15V
Power consumption:	22W Max at start (25°C) 6W at steady state

Data output & monitoring

RS232, 9600 baud rate

Built-in options


- Option 05:** TTL Output
- Option 06:** 1PPS Output
- Option 18:** Extended warranty to 3 years
- Option 20:** Discipline to external GPS 1PPS or 10MHz input
- Option 42:** Low noise floor -170dBc at 10KHz
- Option 75:** Add internal battery, up to 4 hours of battery life.

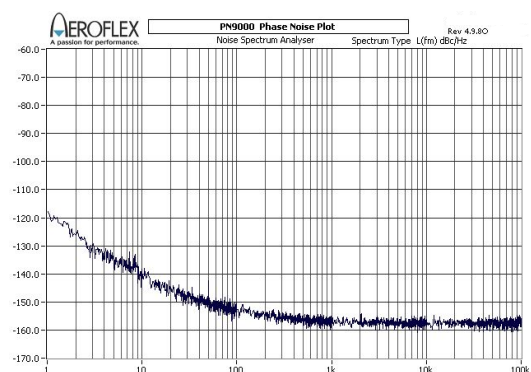

E10-LN Phase Noise (10MHz)


Contact us to configure this product to meet your requirement.
Designed and manufactured in the U.K.

Pin Connections

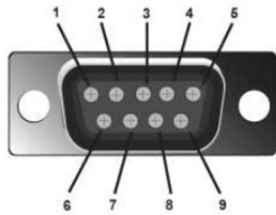

Pin No.	Function	Description
1	Lock Status	OFF: locked, ON: not locked
2	RXD	Serial data receive
3	TXD	Serial data transmit
4	Power Supply	Input power supply between +12 to 15V
5	GND	Ground
6	GND	Ground
7	Frequency adjustment	Apply 0-5 volt to adjust the frequency
8	Voltage reference	+5V supply voltage to be used for frequency adjustment
9	Not used	Not used

Outline Drawing / Enclosure

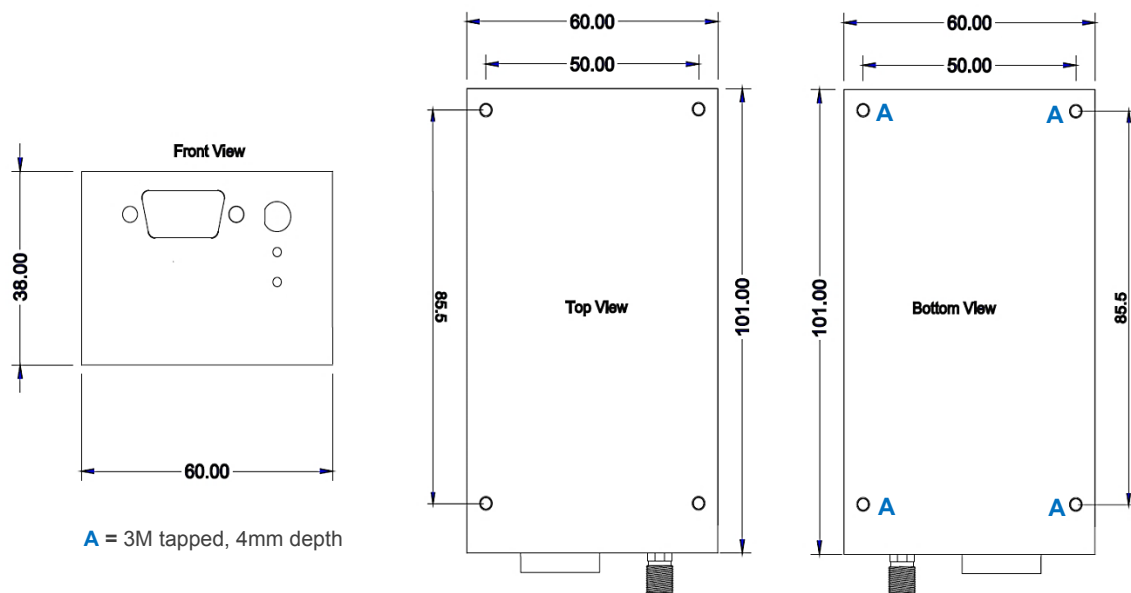

The Quartzlock logo is a registered trademark.
 Quartzlock continuous improvement policy: spec subject to change without notice and not part of any contract.
 Copyright © 2017. Issue 17.01