
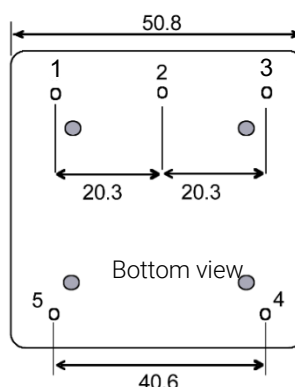


E10-MRX

The E10-MRX is a low cost rubidium oscillator is miniature atomic clock with excellent stability in 50 x 50mm package. This rubidium oscillator has 100 times less drift than OCXO's.


KEY FEATURES

- Frequency 10MHz
- Low phase noise
- Excellent short term stability
- Operating voltage: +5V, +12 to +18V
- 5×10^{-11} accuracy
- Temp stability available to 0.5ppb (-20°C to +60°C)
- 2" inch square package
- Sine wave or HCMOS

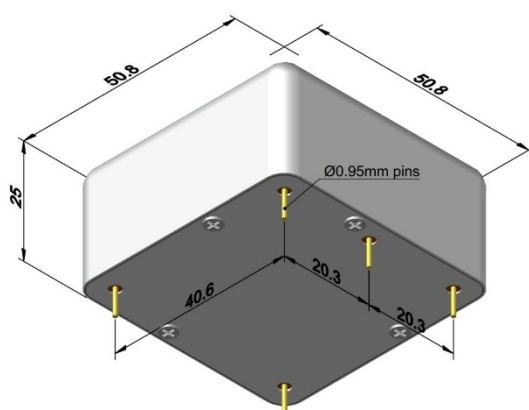

Pin	Function
1	Input frequency control
2	Lock monitor
3	Output signal
4	Ground
5	Power supply input

Optional E10-PPS locking module: The Quartzlock E10-PPS is designed using the digital phase lock loop system to discipline E10-MRX to 1PPS. The control algorithm used is designed to give optimum control results and the fastest possible acquisition from switch on. The Quartzlock E10-PPS is a board level product designed to lock a 10MHz rubidium to the 1PPS time mark signal generated from a GPS receiver, Cesium or Hydrogen maser. E10-PPS can generate stable 1PPS mark from the controlled rubidium.

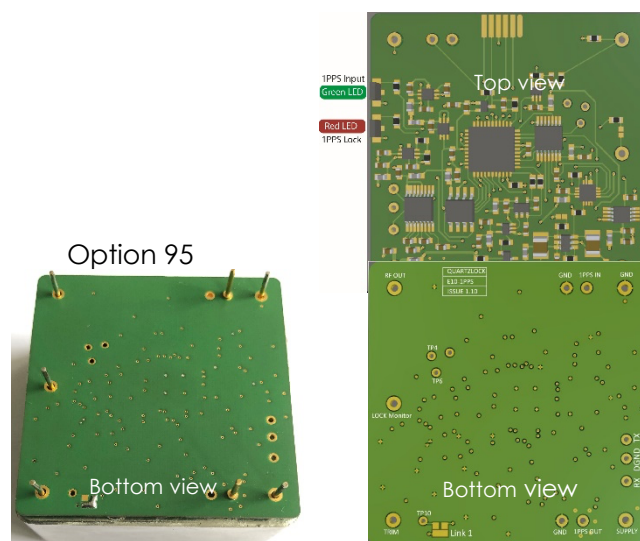

Dimensions: 50x50mm

Please contact sales to specify your requirement.

E10-MRX Specification

Outputs <i>See options</i>		
10MHz	+10dBm (±2dBm) sinewave into 50 Ohms Options: HCMOS	
Frequency Stability <i>Allan Deviation</i>		
Gate time	Standard	Option A
$\tau = 1s$	5×10^{-11}	2×10^{-11}
$\tau = 10s$	2×10^{-11}	8×10^{-12}
$\tau = 100s$	7×10^{-12}	3×10^{-12}
$\tau = 1000s$	2×10^{-12}	8×10^{-13}
Phase Noise (SSB)		
10Hz	-95 dBc	
100Hz	-125 dBc	
1 kHz	-135 dBc	
10KHz	-140 dBc	
Harmonics		
10MHz	<-30dBc	
Spurious		
100 KHz BW	<-70dBc	
Aging (After 30 days)		
Frequency	10MHz	Optional
<i>Per day</i>	5×10^{-12}	3×10^{-12}
<i>Per Month</i>	5×10^{-11}	3×10^{-11}
<i>Per Year</i>	5×10^{-10}	3×10^{-10}
Frequency accuracy		
Accuracy at shipping $\pm 5 \times 10^{-11}$		
Frequency retrace		
After 1 hours of continues operation 3×10^{-11}		
Frequency Adjustment		
Electrical	$\pm 2 \times 10^{-9}$	Positive slop, Control voltage 0 to +5V Input impedance 10K Ohms
Warm up time		
<6 minutes to lock at +25°C		
7 minutes to $< 5 \times 10^{-10}$ at room temperature 25°C		
Lock monitor output		
Locked: Logic Low <0.5V Unlocked: Logic High >4V		

Included with shipment: Calibration certificate, Certificate of Conformance, product test sheet and 24 month warranty.

Environmental			
Temperature :		Storage	-40°C +90°C
	Standard	-20°C +65°C	<0.3x10 ⁻⁹
Temp stability :	Option E	-30°C +65°C	<0.5x10 ⁻⁹
	Option F	-20°C +70°C	<0.5x10 ⁻⁹
	Option G	-30°C +70°C	<0.5x10 ⁻⁹
Relative humidity :	94% non-condensing		
Magnetic Field sensitivity :	2x10 ⁻¹² Gauss		
Atmospheric pressure :	-60m – 4000m 1x10 ⁻¹³ Per mbar		
Approximate MTBF :	100,000 Hrs, Stationary		
Dimensions without cover	50 x 50 x 25mm LWH		
Weight	<200gms		
Power supply			
DC power:	+12 to +15V, +5V (optional)		
Power consumption:	18W Max at start (25°C) 6W at steady state		
Shock/Vibration			

Mechanical Shock: IEC 60068-2-27, Test Ea: Acceleration of 50G peak amplitude for 11ms duration.

Vibration: IEC 60068-2-06, Test Fc: 10Hz-55Hz 1.5mm displacement, 55Hz-500Hz 10G acceleration.

EMI: Compliant to FCC Part 15, Class B.

Built-in options

Option 05: HCMOS

Option 18: Extended warranty to 3 years

Option 95: Add 1PPS locking module

Option 75: Low phase noise high stability [See E10-LN](#)

Contact us to configure this product to meet your requirement.

Create a Part Number

E10-MRX / X X XX - X - X - 10M

Monthly Aging	
5x10 ⁻¹¹	D
3x10 ⁻¹¹	E

Temp. Stability		
±0.5ppb	-30 to +65°C	E
±0.5ppb	-20 to +70°C	F
±0.5ppb	-30 to +70°C	G

Temperature code table			
-50°C	A		
-40°C	B	+60°C	F
-30°C	C	+70°C	G
-20°C	D		
-10°C	E		
0°C	G		
Example: DF = -20°C to +60°C			

Supply Voltage	
+12V	12
+5V	05

Waveform	
Sine	N
HCMOS	Q

How to specify Temperature Code

First code	Lowest temperature A= -50°C
Second code	Highest temperature G= +70°C
Example	-50°C to +70°C

Soldering guidelines

The unit should be mounted on the circuit board after any cleaning and drying process. Hand soldering is recommended with tip temperature of 370°C for 7 seconds and 430°C for 5 seconds maximum. Care must be taken to avoid any excessive bending or stress on the mounting pins. This can cause failure of the pins in the base. This product is not suitable for immersion in cleaning fluids and should not undergo any ultrasonic cleaning process.

Quartzlock logo is a registered trademark.

Quartzlock continuous improvement policy: spec subject to change without notice and not part of any contract. Copyright © 2019. Issue 20.01