


GPS Disciplined Rubidium Frequency & Time Reference

Features

- Sine wave or CMOS/TTL output
- Short term stability $<2 \times 10^{-12}$ at 1sec
- Accuracy to 25ns RMS UTC
- Ultra Low phase noise -115dBc at 1Hz
- National & International Traceable Reference consumption

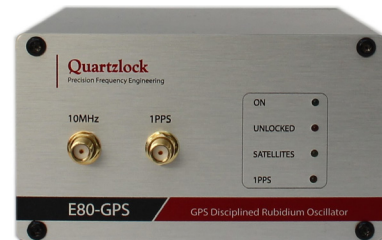

Description

The E80-GPS provides a stable and accurate calibration free GPS time & frequency with multiple outputs signal formats is a cost effective solution for applications require frequency reference. This reference maintains high time and frequency accuracy required for demanding applications.

The added advantage of the internal rubidium module is that there is no measurable difference between the stability when locked to GPS or in Holdover mode with measurement times up to 1000s.

Applications

- 1×10^{-12} frequency accuracy
- No Drift
- 50ns 1PPS accuracy to UTC
- RS232 NMEA NTP Time Reference
- Alternative Cesium
- No Calibration
- Excellent holdover performance up to measurement time up to 1000s
- National & International traceable reference
- Microwave Test Bench or Test solution

Related frequency reference products

- **E8000**: Low Noise 1U 19" rack mount GPS disciplined OCXO up to 12 output, 1 to 100MHz
- **E8010**: Low Noise 1U 19" rack mount GPS disciplined rubidium up to 12 output, 1 to 100MHz
- **E8-Y**: Low cost and Low Noise Desktop GPS disciplined OCXO 1 to 4 outputs
- **E8-X**: Low cost Desktop GPS disciplined TCXO 1 to 4 outputs

E80-GPS Specification

Outputs *See options*

10MHz	+8dBm (± 2 dBm) into 50 Ohms, 0.56V _{rms} (Specify for 75Ω load)
Connector	BNC standard (SMA available)
No. outputs	1-6

Frequency Stability *Allan Deviation*

	Options A	Options B	Options C
Frequency	10MHz	10MHz	10MHz
$\tau = 1s$	$\leq 6 \times 10^{-11}$	$\leq 2 \times 10^{-12}$	$\leq 8 \times 10^{-13}$
$\tau = 10s$	$\leq 3 \times 10^{-11}$	$\leq 4 \times 10^{-12}$	$\leq 2 \times 10^{-12}$
$\tau = 100s$	$\leq 2 \times 10^{-11}$	$\leq 6 \times 10^{-12}$	$\leq 4 \times 10^{-12}$

Phase Noise (SSB)

	Options 1	Options 2	Options 3	Options 4
Frequency	10MHz	10MHz	10MHz	10MHz
1Hz	-67 dBc	-100 dBc	-110 dBc	-115 dBc
10Hz	-95 dBc	-125 dBc	-136 dBc	-140 dBc
100Hz	-127 dBc	-145 dBc	-150 dBc	-154 dBc
1 kHz	-145 dBc	-150 dBc	-155 dBc	-155 dBc
10KHz	-144 dBc	-155 dBc	-157 dBc	-160 dBc

Harmonics	Standard	Options C
	<-30dBc	<-45dBc

Spurious	Standard	Options C
100 KHz BW	<-100dBc	<-100dBc

1PPS Output

Accuracy	<+12ns
Pulse Width	10 millisecond
Output level	CMOS 0-3.3V

Timing accuracy at Holdover

Per 24 hours	1μ sec.
--------------	---------

Frequency aging at Holdover mode

Per day	5×10^{-12}	No GPS lock ¹
Per month	5×10^{-11}	

Warm-up time

<15 minutes, time to lock at room temperature 25°C

1. In the event of GPS signal loss the E80-GPS automatically switches to holdover mode.

Included with shipment: Calibration certificate, Certificate of Conformance, product test sheet and 24 month warranty.

Environmental

Temperature :	Operating	-40°C +60°C
	Storage	-40°C +90°C
Temp stability (no GPS lock):	Standard	-20°C +60°C <0.3x10 ⁻⁹
	Option E	-30°C +65°C 0.3x10 ⁻⁹
	Option F	-50°C +65°C 0.5x10 ⁻⁹

Relative humidity : 92% non-condensing

Magnetic Field sensitivity : 2x10⁻¹¹ Gauss

Atmospheric pressure : 1x10⁻¹³ Per mbar

Approximate MTBF : 100,000 Hrs, Stationary

Dimensions without cover 122 x 105 x 60mm LWH

Weight: Without battery 600gms
With internal battery 750gms

Power supply

External DC supply: +12 to 15

Power consumption: 22W Max at start (25°C)
6W at steady state

Data output & monitoring Options D

RS232, 9600 baud rate	USB	Ethernet
-----------------------	-----	----------

NMEA output sentences: GPGLL, GPGGA, GPGSA, GPGSV & GPRMC

GPS data output in TSIP forma.

Processor data include unit status.

Built-in options

- Option 02:** Output 2048kHz
- Option 03:** Output 1544kHz
- Option 04:** 13MHz Output
- Option 05:** CMOS/TTL Output
- Option 07:** 10.24MHz Output
- Option 08:** 10.23MHz Output
- Option 09:** Add 6 Output Distribution Card
- Option 10:** 26MHz Output
- Option 11:** 1MHz Output
- Option 12:** 5MHz Output
- Option 18:** Extended warranty to 3 years
- Option 20:** Discipline to external GPS 1PPS or 10MHz input
- Option 42:** Low noise floor -170dBc at 10KHz
- Option 51:** Rack Mount 19" 1U
- Option 62:** AC Input 110V
- Option 75:** Add internal battery, up to 4 hours of battery life.

Contact us to configure this product to meet your requirement.
Designed and manufactured in the U.K.

Typical configuration

The E80-GPS can be configured to frequencies 1 to 100MHz of your preferred signal format. Standard connectors are BNC and SMA, other connectors are available.



Examples of front and rear panel configuration.

Standard accessories supplied with E80-GPS

All Quartzlock GPS frequency references are supplied with **power supply, standard GPS Antenna, Manual, Test sheet, Calibration certificate and Certificate of conformance.**



Power supply



Standard GPS antenna with 5 meters of cable

Optional upgrade

The High Gain GPS Antenna is designed for stationary application, all weather and harsh environment to provide a strong signal. This antenna is also a high-quality solution for adding GPS RF signals to marine GPS navigation systems. The high gain GPS antenna can be setup with up to 70 meters of cable. The high gain GPS antenna is supplied with stainless steel antenna mount.



High Gain GPS antenna

High Gain GPS Antenna specifications:

Waterproof, weatherproof
 Operating Temp -40°C to +85°C
 Gain: 35dB ±3dB
 Voltage: +5V
 Connector: TNC
 L1 GPS, 1575.42MHz ±1.023MHz
 ROHS compliant



Antenna mount & coaxial cable

The Quartzlock logo is a registered trademark.
 Quartzlock continuous improvement policy: spec subject to change without notice and not part of any contract.
 Copyright © 2017. Issue 17.01

